


Relay terminal box for 12 circuits manual


CC II - TBOX

For CCII-LA-S/C

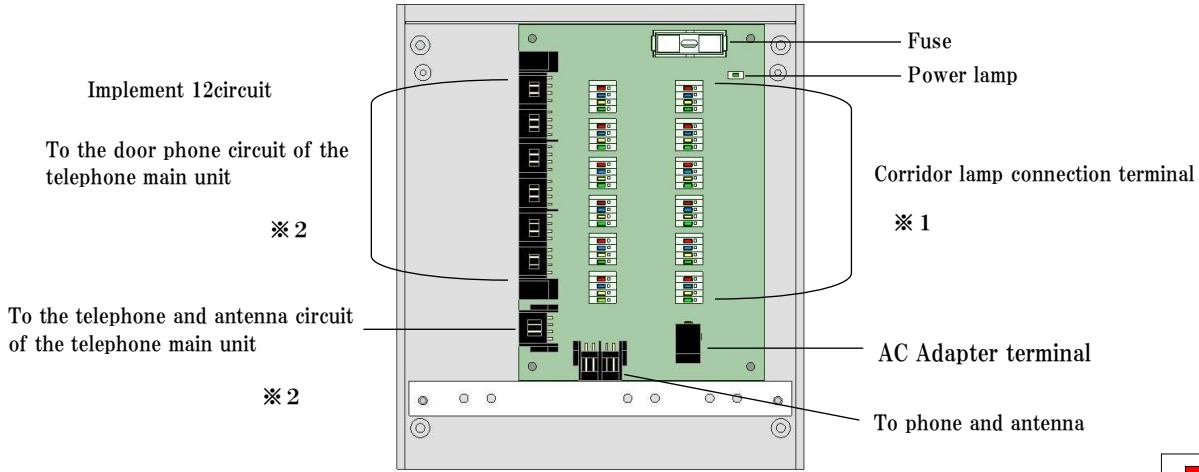

※ 1 The connection terminal is a screw-less terminal Compatible $\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$ cable.

※ 2 The connection terminal is a quick terminal Compatible $\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$ cable.

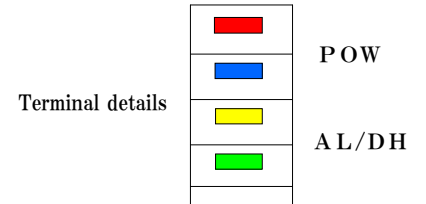

Installation conditions and conditions of use

Operating ambient temperature	0 ~ 40 °C
Operating ambient humidity	25% ~ 85% (With no condensation)
Working voltage	Input voltage AC100v ~ 240v Output voltage DC24V ± 10%
Usable cable	$\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$

⚠ CAUTION Do not short circuit the power. Can cause fire or malfunction.

⚠ CAUTION Do not connect the power supply wires to terminal other than those specified. Can cause fire or malfunction.

